VALVE COMMUNICATION AND CONTROL

EXPLOSIONPROOF LINEAR POINT SENSOR



METSO 7 HX 21 EN






Hawkeye HX

Rugged, corrosion proof for all hazardous locations

The explosionproof Hawkeye, with its stainless steel enclosure, is designed for service in harsh process environments. It features a solid state proximity sensor which is encased in a shock absorbent urethane potting material. Outputs for universal switching or NAMUR (EN 60947-5-6; I.S.) are standard options.



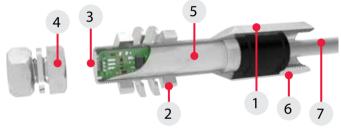


Features

- 1. 316 stainless steel enclosure is extremely durable and corrosion resistant.
- **2. Stainless steel washers and fasteners** included with HX enable secure vibration resistant mounting.
- **3. Solid state magnetic sensor** detects trigger at distances up to 6 mm (extended sensing range also available).
- **4.** Magnetic trigger is embedded and sealed with a widetemperature corrosion-resistant urethane in the included stainless steel bolt.
- **5. Sensor electronics are urethane sealed** in a module which is additionally sealed within the stainless steel enclosure assuring high tolerance to shock and vibration.
- 6. All conduit/connector options (½"NPT, M20 and cable gland) are available with standard 6-foot cord lengths allowing flexible wiring options.
- 7. No seal offs are required with explosion proof conduit systems, reducing installation costs.
- **8. Suitable for most hazardous locations** explosion proof, flame proof Div 1/Zone 1; intrinsically safe Div 1/Zone 0.

TECHNICAL BULLETIN 4/16 Valve communication & control


Sensor specifications		
SST switching sensor (35)		
Configuration	(1) SST magnetic solid state sensor	
Operations	Normally open (NO) for Normally closed (NC), consult factory	
Maximum current inrush	1.0 amp	
Maximum current continuous	0.1 amp	
Maximum leakage current	0.25 mA (VAC) 0.15 mA (VDC)	
Voltage range	20 - 250 VAC 8 - 250 VDC	
Maximum voltage drop	6.5 volts @ 10 mA 7.2 volts @ 100 mA	
Wiring diagram (35) normally open Common Normally Open Ground		
NAMUR sensor (45)		
Configuration	(1) NAMUR sensor (EN 60947-5-6; I.S.)	
Operation	Normally closed (NC) NAMUR sensor (solid state)	
Voltage range	5 - 29 VDC	
Current ratings	Target on I<1 mA Target off I>3 mA	
Wiring diagram (45)	****	

Ratings		
Explosionproof (Ex d, Zone 1 or Class I and II, Div. 1)	All models*	
Intrinsically safe (Ex ia, Zone 0 or Class I and II, Div. 1)	Function 45*	
Enclosure protection		
NEMA	4, 4X and 6 (all models)	
Ingress Protection	IP66/68	
Approvals*	See StoneL.com/approvals	
* Only models listed on StoneL's official web site are approved per specific rating.		

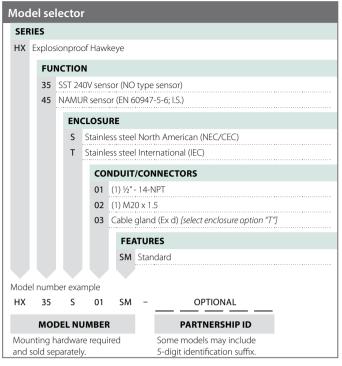

Specifications	
Materials of construction	
Enclosure and fasteners	316 stainless steel
Trigger	316 stainless steel and urethane
Other specifications*	
Conduit connection	½" NPT or M20
Wiring	72" (1.8 meters) length 18 gauge multi-strand in a single jacket ITC and PLTC rated
Sensing distance	4-6 mm Extended range available
Temperature range	-40° C to 80° C (-40° F to 176° F) Consult factory for ultra-cold temperature
Warranty	Five years
	ons available in the installation manual available on sult factory for additional specifications.

3

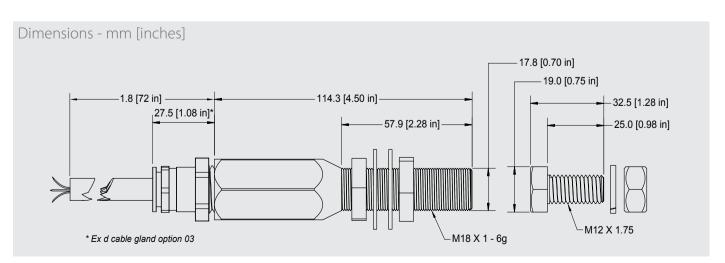

Valve communication & control TECHNICAL BULLETIN 4/16

Metso Flow Control Inc. Europe, Vanha Porvoontie 229, P.O. Box 304, FI-01301 VANTAA, Finland. Tel. +358 20 483 150. Fax +358 20 483 151

North America, 26271 US Hwy 59, Fergus Falls, MN 56537, USA. Tel. +1 218 739 5774. Fax +1 218 739 5776

South America, Av. Independéncia, 2500- Iporanga, 18087-101, Sorocaba-São Paulo, Brazil. Tel. +55 15 2102 9700. Fax +55 15 2102 9748/49

Asia Pacific, Haw Par Centre #06-01, 180 Clemenceau Avenue, Singapore 239922. Tel. +65 6511 1011. Fax +65 6250 0830

China, 11/F, China Youth Plaza, No.19 North Rd of East 3rd Ring Rd, Chaoyang District, Beijing 100020, China. Tel. +86 10 6566 6600. Fax +86 10 6566 2583.

Middle East, Roundabout 8, Unit AB-07, P.O. Box 17175, Jebel Ali Freezone, Dubai, United Arab Emirates. Tel. +971 4 883 6974. Fax +971 4 883 6836

www.metso.com/valves

Subject to change without prior notice.

