





## You know it when you see it.

It's not just a roof.
It's a CertainTeed roof.

Quality. Durability. Style. Color.


When you select a roof for your home, there's a lot to consider.

That's when a roof becomes more than just a roof. The same way a home is more than just a house.

You want the best for your home and everything in it.

So why guess, when you can be Certain?





Integrity Roof

System

System

and get the ultimate in roof performance!



#### A superior roof is stronger than the sum of its parts

Your roof should do more than shield the elements. It should protect your home, and more importantly, everything you care about.

The Integrity Roof System is designed to provide optimum performance, day after day, year after year. It's a full suite of roofing components engineered to complement each other and create an active defense against whatever gets in your home's way.

After all, the Integrity Roof System is backed by the power of CertainTeed – and better-quality components means you've got a roof system built to protect against even the most extreme conditions.

Waterproofing Underlayment

Waterproofing shingle underlayment prevents leaks from wind-driven rain and ice dams

2. Water-Resistant Underlayment

High-performance underlayment provides a water-resistant layer over the roof deck and a secondary barrier against leaks

3. Starter Shingles

Perfect starts every time and designed to work in tandem with the roof shingles above

4. Roof Shingles

Choose the best, covered by the strongest warranty in the business

5. Hip & Ridge Caps

Perfect finish for hip and ridge lines, complementing all CertainTeed shingles

6. Roof Ventilation

Engineered for ideal roof ventilation especially when matched with CertainTeed Intake Vents



# Technology that protects the beauty of your roof and strengthens its performance.


## **Streak**Fighter®

Algae Resistance

## THE ULTIMATE IN STAIN PROTECTION.

Those streaks you see on other roofs in your neighborhood? That's algae, and it's a common eyesore on roofing throughout North America. CertainTeed's StreakFighter technology uses the power of science to repel algae before it can take hold and spread. StreakFighter's granular blend includes naturally algaeresistant copper, helping your roof maintain its curb appeal and look beautiful for years to come.

Granule with Streak Fighter Technology



ClimateF/ex®

All-Weather Application

Outstanding durability. Featuring the latest advances in polymer science, CertainTeed's ClimateFlex technology works at a molecular level to make shingles strong and pliable. The rubber-like qualities of the ClimateFlex asphalt formula provides each shingle with improved hail resistance, cold-weather flexibility, and granule adhesion.








and greater weathering endurance thar

standard asphalt shingles




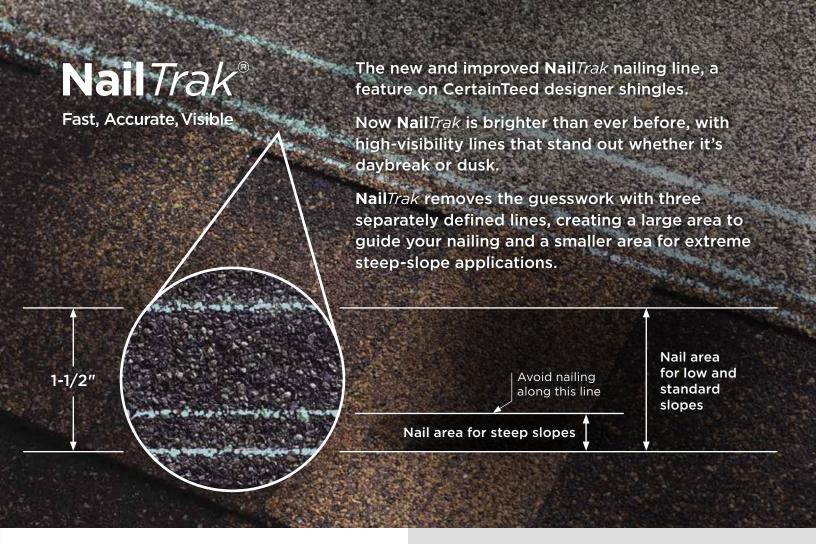

## **Quadra**Bond<sup>™</sup>

#### **Advanced Layering**

CertainTeed's specially formulated adhesive adheres shingle layers at four points, more than any other manufacturer. This superior bond provides greater protection against shingle delamination to maximize performance over the life of the shingle in any climate.

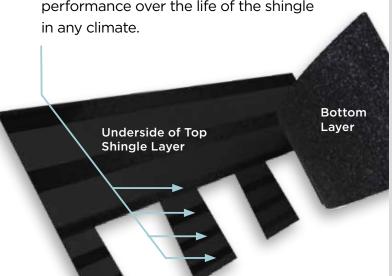



## **Certa**Seal™

#### **Uplift Protection**


**Certa**Seal<sup>™</sup> is a fast-activating modified asphalt sealant with a 20-year record of proven performance. Designed to seal shingles together upon installation, it protects roofs from wind uplift and shingle blow-off so that homes stay safe and dry. It's also engineered

to remain flexible after installation, unlike harder sealants that can dry out and crack over time.



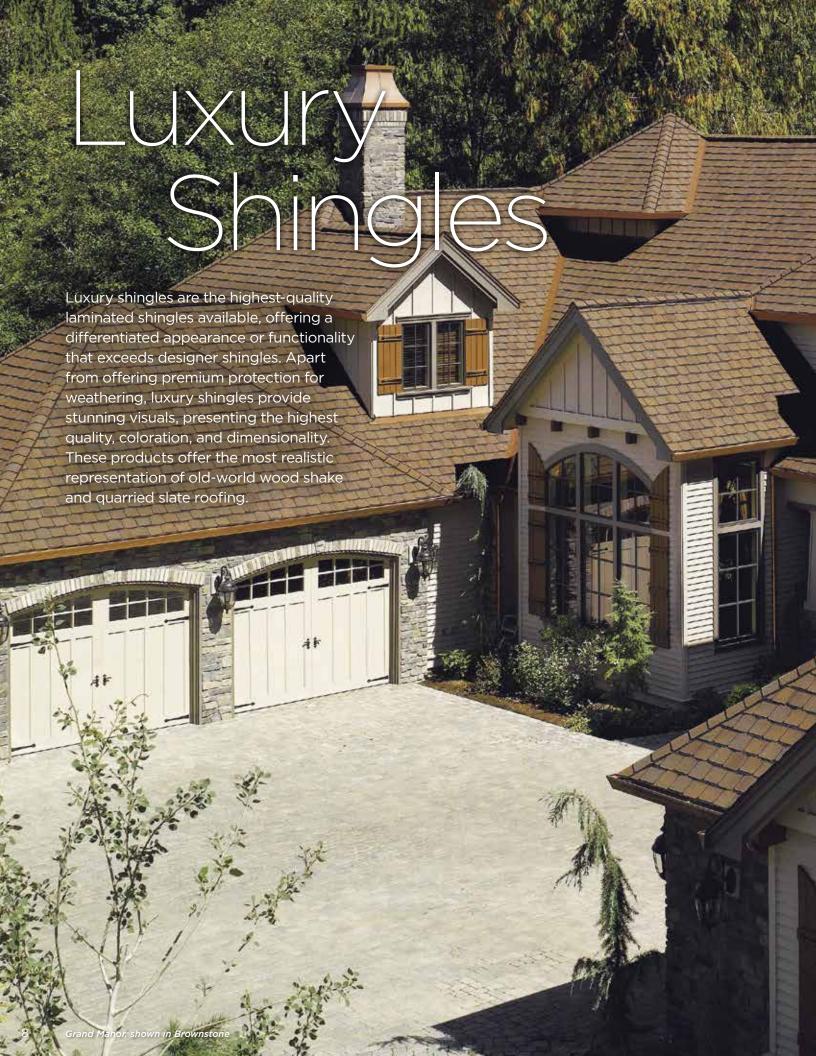



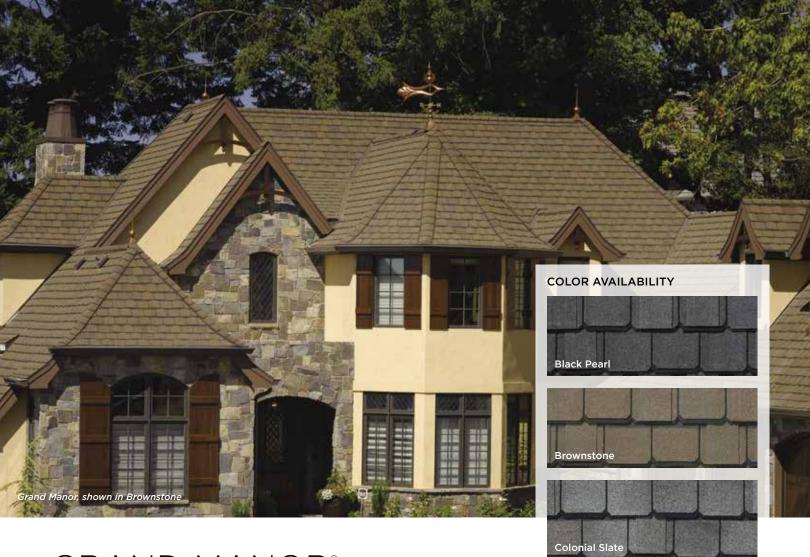

## **GRAND MANOR®**

- Two full-size, fiberglass-based shingles with randomly applied tabs
- Authentic depth and dimension of natural slate
- Virtual five-layer coverage when applied
- Lifetime limited transferable warranty - residential\*
- 50-year limited transferable warranty – group-owned or commercial\*
- 15-year **Streak** *Fighter* algae-resistance warranty
- 10-year SureStart<sup>™</sup> protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- High-Performance Starter and hip and ridge accessory available (see details in back of brochure)
- \* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

#### Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

#### Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

#### Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

#### Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

#### **Quality Standards:**

• ICC-ES-ESR-1389 & ESR-3537














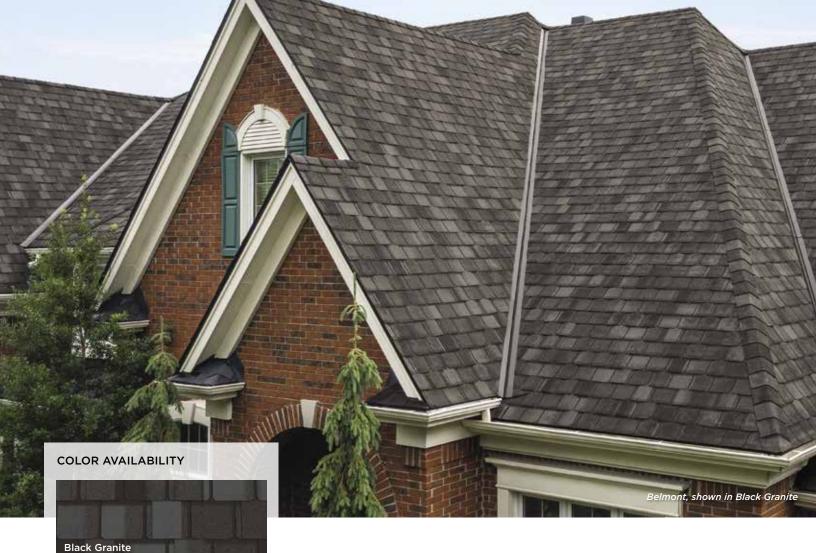












## **BELMONT®**

- Authentic depth and dimension of natural slate
- Lifetime limited transferable warranty – residential\*
- 50-year limited transferable warranty – group-owned or commercial\*
- 15-year **Streak** Fighter algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- High-Performance Starter and hip and ridge accessory available (see details in back of brochure)
- All colors are available in an Impact Resistant version



\* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

#### Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018
   Type 1

#### Wind Resistance:

- UL certified to meet ASTM D3018
   Type 1
- ASTM D3161 Class F


#### Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

#### **Impact Resistance:**

 All colors available in a version that meets UL2218 Class 4



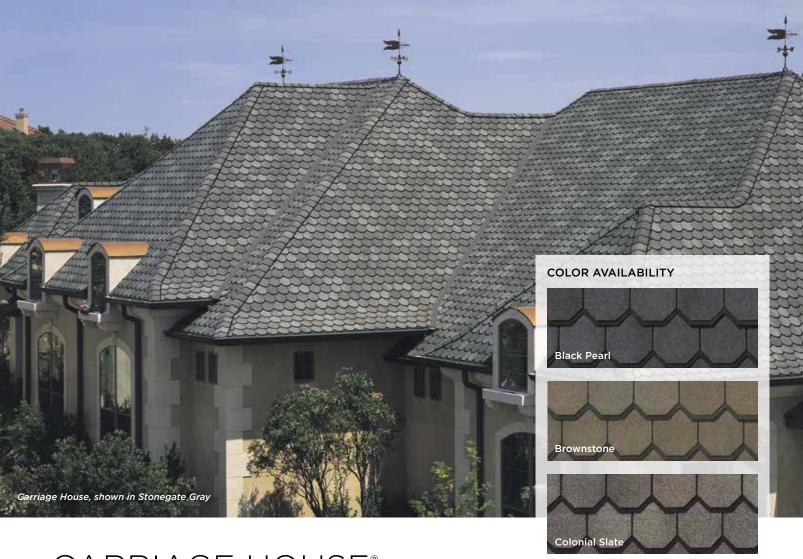

## CARRIAGE HOUSE®

- Two full-size, fiberglass-based shingles
- Unique chamfered cut for scalloped appearance
- Four-layer coverage when applied
- Lifetime limited transferable warranty – residential\*
- 50-year limited transferable warranty – group-owned or commercial\*
- 15-year **Streak**Fighter<sup>®</sup> algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Hip and ridge accessory available (see details in back of brochure)
- \* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

#### Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

#### Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

#### Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

#### Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

#### **Quality Standards:**

• ICC-ES-ESR-1389 & ESR-3537



Scan code for more information

#### **GRAND MANOR and CARRIAGE HOUSE SHINGLES**

These two shingles can be combined to create a myriad of custom patterns, emulating traditional slate roof designs.

























## PRESIDENTIAL SHAKE® TL

- Three-piece laminated fiberglass construction
- Distinctive sculpted, rustic look
- Lifetime limited transferable warranty - residential\*
- 50-year limited transferable warranty – group-owned or commercial\*
- 15-year **Streak**Fighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Presidential Starter (required) and hip and ridge accessory available (see details in back of brochure)
- \* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

#### Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

#### Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

#### Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5


#### Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

#### **Quality Standards:**

• ICC-ES-ESR-1389 & ESR-3537



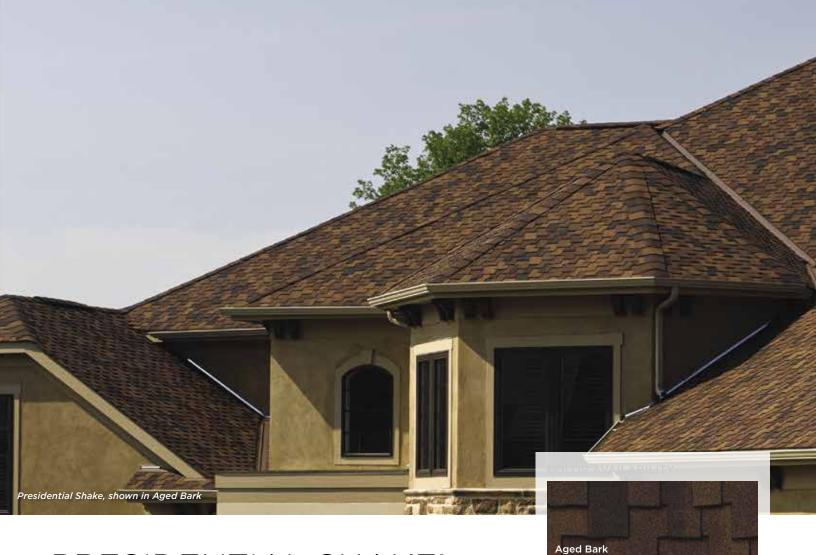

## PRESIDENTIAL SHAKE®

- Two-piece laminated fiberglass construction
- Distinctive sculpted, rustic look
- Lifetime limited transferable warranty - residential\*
- 50-year limited transferable warranty
   group-owned or commercial\*
- 15-year StreakFighter® algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- Presidential Starter (required) and hip and ridge accessory available (see details in back of brochure)
- \* See warranty for specific details and limitations.
- \*\* Color available in impact resistant version.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

#### Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

#### Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

#### **Tear Resistance:**

- UL certified to meet ASTM D3462
- CSA standard A123.5

#### Impact Resistance:

 Select colors (\*\*) available in version that meets UL2218 Class 4

#### Wind Driven Rain Resistance:


 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

#### **Quality Standards:**

• ICC-ES-ESR-1389 & ESR-3537















# Designer Shingles

Also known as architectural or dimensional shingles, designer shingles are the most prevalent asphalt shingles installed in North America. These products are manufactured with two or more layers of asphalt that are fused together for a thicker and richer multi-dimensional appearance, and are engineered to replicate the aesthetics of wood shake and natural slate roofing. Designer shingles are typically heavier than strip shingles and have improved warranty protection.





## LANDMARK® PREMIUM

- Two-piece laminated fiberglass-based construction
- Classic shades and dimensional appearance of natural wood or slate
- Lifetime limited transferable warranty – residential\*
- 50-year limited transferable warranty
   group-owned or commercial\*
- 15-year **Streak**Fighter<sup>®</sup> algae-resistance warranty
- NailTrak® extra-wide nailing area for accurate installation
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)
- \* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

#### Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

#### Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

#### **Tear Resistance:**

- UL certified to meet ASTM D3462
- CSA standard A123.5

#### Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.


#### **Quality Standards:**

• ICC-ES-ESR-1389 & ESR-3537


#### **COLOR AVAILABILITY**
















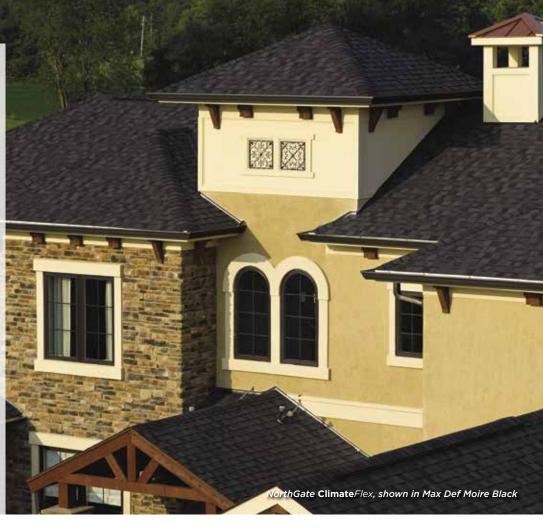













## NORTHGATE® ClimateFlex®

- Two-piece laminated fiberglass-based construction
- Greater cold-weather flexibility, increased ductile properties, increased granule adhesion and enhanced crack resistance
- Classic shades and dimensional appearance of natural wood or slate
- Lifetime limited transferable warranty – residential\*
- 50-year limited transferable warranty - group-owned or commercial\*
- 15-year **Streak** *Fighter* algae-resistance warranty
- NailTrak® extra-wide nailing area for accurate installation
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)
- \* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

#### Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018
   Type 1

#### Wind Resistance:

- UL certified to meet ASTM D3018
   Type 1
- ASTM D3161 Class F

#### Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

#### **Impact Resistance:**

• UL2218 Class 4



#### **Quality Standards:**

• ICC-ES-ESR-1389 & ESR-3537





## LANDMARK® PRO

- Two-piece laminated fiberglass-based construction
- Classic shades and dimensional appearance of natural wood or slate
- Lifetime limited transferable warranty - residential\*
- 50-year limited transferable warranty group-owned or commercial\*
- 15-year **Streak**Fighter<sup>®</sup> algae-resistance warranty
- NailTrak® extra-wide nailing area for accurate installation
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)
- \* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

#### Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

#### Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

#### Tear Resistance:

- UL certified to meet ASTM D3462
- CSA standard A123.5

#### **Quality Standards:**

• ICC-ES-ESR-1389 & ESR-3537

































Moire Black











## LANDMARK®

- Two-piece laminated fiberglass-based construction
- Classic shades and dimensional appearance of natural wood or slate
- Lifetime limited transferable warranty\*
- 10-year StreakFighter® algae-resistance warranty
- Nail Trak® extra-wide nailing area for accurate installation
- 10-year SureStart<sup>™</sup> protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- CertainTeed Starter and hip and ridge accessory available (see details in back of brochure)
- \* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

#### Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

#### Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

#### Tear Resistance:

- UL certified to meet **ASTM D3462**
- CSA standard A123.5

#### **Quality Standards:**

• ICC-ES-ESR-1389 & ESR-3537





## HIGHLAND SLATE®

- Single layer fiberglass-based construction
- Blended shades and dimensional appearance of natural slate
- 8" exposure, 18" x 36" size
- Lifetime limited transferable warranty - residential\*
- 50-year limited transferable warranty – group-owned or commercial\*
- 15-year **Streak** *Fighter* algae-resistance warranty
- 10-year SureStart™ protection
- 15-year 110 mph wind-resistance warranty
- Wind warranty upgrade to 130 mph available. CertainTeed starter and CertainTeed hip and ridge required
- \* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

#### Fire Resistance:

- UL Certified to meet ASTM D3018 Type 1
- UL 790 Class A
- ASTM E 108 Class A

#### Wind Resistance:

- UL 2390/ASTM D 6381 Class H
- ASTM D3161 Class F

#### **Tear Resistance:**

- UL Certified to meet ASTM D3462
- CSA Standard A123.5

#### Wind Driven Rain Resistance:

 Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.


#### **Quality Standards:**

• ICC-ES-ESR-1389 & ESR-3537

#### **COLOR AVAILABILITY**

















## CERTAINTEED XT<sup>™</sup>25

In addition to a full contingent of luxury and designer shingles, CertainTeed also offers XT25 traditional shingles, designed for long-lasting performance and durability.

- Fiberglass composition
- Designed for long-lasting performance and durability
- 25-year limited transferable warranty\*
- 10-year Streak Fighter algae-resistance warranty
- 5-year SureStart<sup>™</sup> protection
- 5-year 60 mph wind-resistance warranty
- \* See warranty for specific details and limitations.

CertainTeed products are tested to ensure the highest quality and comply with the following industry standards:

#### Fire Resistance:

- UL Class A
- UL certified to meet ASTM D3018 Type 1

#### Wind Resistance:

- UL certified to meet ASTM D3018 Type 1
- ASTM D3161 Class F

#### Tear Resistance:

• UL certified to meet ASTM D3462

#### Wind Driven Rain Resistance:

• Miami-Dade Product Control Acceptance: Please reference www.certainteed.com to determine approved products by manufacturing location.

#### **Quality Standards:**

ICC-ES-ESR-1389 & ESR-3537


















#### HIP AND RIDGE ACCESSORIES



#### Shadow Ridge®

- For hip and ridge capping
- Single-layer coverage for product versatility
- Sealant strip for maximum adherence
- Dimensions are 12" x 12", with a 5" exposure
- Can be used on shingleover vents or directly over centerline of hip or ridge
- Available in complementary product colors (see individual Roofing Plant Catalogs for color availability)
- Available in ClimateFlex\* version, to be used with ClimateFlex\* Shingles



#### Shangle® Ridge

- Hip and ridge capping
- · Two full layers
- 12" width allows application over standard ridge vents
- Full 8" exposure
- Matches all Grand Manor, Highland Slate, Carriage House and Belmont colors
- · Algae resistant



#### Cedar Crest®

- Dimensions are (overall) 12" x 36", separated into individual pieces 12" x 12", with an 8" exposure
- Covers 20 lineal feet per bundle
- Matches Landmark Series, Presidential Shake, Presidential Shake TL, Highland Slate and Belmont colors




#### Mountain Ridge®

- Fiberglass reinforced SBS modified bitumen
- Five layer design with tri-laminate base
- 10" width
- 8" exposure





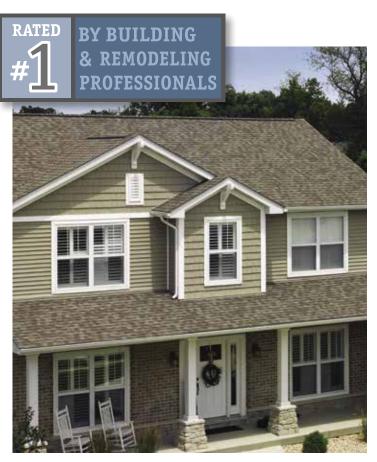

## What's behind our #1 rating?


Builders and remodelers across America know certain things to be true of CertainTeed. For starters, we've been in the roofing business for over 100 years. We have thousands of satisfied homeowners. The process of building that satisfaction begins the moment you turn to us.

CertainTeed offers you the broadest range of color and style choices. But you'll see it's not style over substance. You'll get a roof that's made from the highest quality materials and backed by a strong warranty program. It's our promise to you: quality made certain, satisfaction guaranteed.

## Underlayment Protection

#### WINTERGUARD®







WinterGuard is installed under shingled roofing to prevent water damage from ice dams, as well as wind-driven rain.

WinterGuard Sand and WinterGuard Granular are designed for use on roof decks as a waterproofing underlayment beneath shingle, slate and tile roofs to prevent leakage due to water backup from ice dams or wind-driven rain. WinterGuard HT, an advanced waterproofing underlayment, is specially formulated to resist high roof temperatures and is the only WinterGuard product to be warranted for use under metal roofs. WinterGuard is most commonly used in critical areas such as roof eaves, valleys and low-slope applications.

WinterGuard is classified by Underwriters Laboratories (UL) to be a suitable underlayment for use in any UL Class A, B or C fire rated shingle system, and it is manufactured to meet ASTM D1970.

#### WINTERGUARD® METAL

WinterGuard Metal self-adhering underlayment has a tough, tear-resistant film on its top surface that will not scratch roofing metal applied over it. The adhesive bottom surface of WinterGuard Metal is protected with a disposable silicone-coated release film, which is split longitudinally down the middle for easier application. Manufactured to meet ASTM D1970.

For specific details and limitations, refer to the actual product warranties.

#### **DIAMONDDECK®**

DiamondDeck is a synthetic, scrim-reinforced, water-resistant underlayment that can be used beneath shingle, shake, metal, or slate roofing. It is manufactured to provide best-in-class performance in terms of both weather protection and contractor safety. 10-square roll (4-foot wide and 250-foot long) is easier to handle and faster to apply than standard felt rolls.

#### ROOFRUNNER®

Lightweight synthetic polymer-based underlayment outperforms felt and outclasses other synthetics. Designed for use on roof decks as a water-resistant layer beneath asphalt roofing shingles, this scrim-reinforced underlayment includes a special top surface treatment that provides excellent slip resistance, even when wet. Large roll size - 4ft wide x 250 ft long - speeds application.



## SureStart<sup>™</sup> Protection

Because CertainTeed roofing products are manufactured to the highest quality standards, we confidently include the additional assurance of SureStart™ protection with all CertainTeed shingles. SureStart provides the strongest protection you can get in the vital early years after your new roof has been installed.

Simply put, if a manufacturing defect is discovered during the SureStart period, CertainTeed will provide reimbursement of 100% of the cost of the shingles and labor to repair the defective shingles or apply new shingles to replace the defective shingles.

See actual warranty for details and limitations.

| Lifetime Limited<br>Warranty Shingles | 3-STAR<br>Protection | 4-STAR<br>Protection | 5-STAR<br>Protection  |  |  |
|---------------------------------------|----------------------|----------------------|-----------------------|--|--|
| Coverage                              | 20 years             | 50 years*            | 50 years <sup>™</sup> |  |  |
| Materials & Labor                     | ~                    | ~                    | <b>V</b>              |  |  |
| Tear-off                              | ~                    | ~                    | <b>V</b>              |  |  |
| Disposal                              |                      | ~                    | <b>V</b>              |  |  |
| Workmanship                           |                      |                      | <b>/</b> ***          |  |  |

**NOTE:** XT<sup>112</sup>25 shingles carry 10 years with 3-STAR, 20 years with 4-STAR and 25 years with 5-STAR coverage, including the features as indicated above.

Fully transferable for 10 years with 3-STAR Coverage, 12 years with 4-STAR Coverage, and 15 years with 5-STAR Coverage.

- \*Applies to single-family detached houses. Duration for all other types of structures is limited to 25 years.
- \*\*Applies to single-family detached houses. Duration for all other types of structures is limited to 30 years.
- \*\*\*Workmanship is covered for 25 years.

Flat Roof Sections: If a CertainTeed Flintlastic self-adhered roof system is part of the job, up to 10 squares will be covered for 12, 15 or 20 years depending upon the specific system installed. Refer to the Commercial Systems Specifications Manual for all other Flintlastic systems.



### SELECTION GUIDE

| LUXURY SHI   | INGLES      | Shingle<br>Construction<br>and Description  | UL Class A Fire<br>Resistance Rating | UL Certified to Meet<br>ASTM D3462 | UL Certified to<br>Meet ASTM<br>D3018 Type 1 | UL 2218 Impact<br>Resistance Rating | ASTM D3161<br>Wind Resistance |
|--|-------------|---|--------------------------------------|------------------------------------|--|-------------------------------------|-------------------------------|
| Grand Manor  |             | Two full-size, fiberglass-based shingles with randomly applied tabs; Authentic depth and dimension of natural slate; Virtual five-layer coverage when applied | ~                                    | ~                                  | V  |                                     | Class F,<br>110 mph           |
| Belmont Impact Resistant Version Available                             |             | Single layer, fiberglass-based shingles with randomly applied tabs; Authentic depth and dimension of natural slate  | ~                                    | >                                  | ٧  | Class 4                             | Class F,<br>110 mph           |
| Carriage<br>House  | لللك        | Two full-size, fiberglass-based shingles;<br>Unique chamfered cut for scalloped<br>appearance; Four-layer coverage when applied                               | •                                    | >                                  | >  |                                     | Class F,<br>110 mph           |
| Presidential<br>Shake TL   |             | Three-piece laminated fiberglass construction;<br>Distinctive sculpted, rustic look   | •                                    | ٧                                  | >  |                                     | Class F,<br>110 mph           |
| Presidential Shake  Impact Resistant Version Available (Select colors) |             | Three-piece laminated fiberglass construction;<br>Distinctive sculpted, rustic look   | ~                                    | >                                  | >  | Class 4                             | Class F,<br>110 mph           |
| DESIGNER S   | HINGLES     |   |                                      |                                    |  |                                     |                               |
| Landmark<br>Premium  |             | Two-piece laminated fiberglass-based construction; Classic shades and dimensional appearance of natural wood or slate   | ~                                    | ~                                  | <b>&gt;</b>                                  |                                     | Class F,<br>110 mph           |
| NorthGate<br>ClimateF/ex*  |             | Two-piece laminated fiberglass-based construction; Greater cold-weather flexibility, increased ductile properties.  | ~                                    | ٧                                  | ٧  | Class 4                             | Class F,<br>110 mph           |
| Landmark<br>PRO  |             | Two-piece laminated fiberglass-based construction; Classic shades and dimensional appearance of natural wood or slate   | ~                                    | ~                                  | ٧  |                                     | Class F,<br>110 mph           |
| Landmark   |             | Two-piece laminated fiberglass-based construction; Classic shades and dimensional appearance of natural wood or slate   | •                                    | ~                                  | <b>&gt;</b>                                  |                                     | Class F,<br>110 mph           |
| Highland Slate   |             | Single layer fiberglass-based construction;<br>Blended shades and dimensional appearance<br>of natural slate  | ~                                    | ~                                  | ٧  |                                     | Class F,<br>110 mph           |
| TRADITION  | AL SHINGLES |   |                                      |                                    |  |                                     |                               |
| XT 25  |             | Fiberglass composition; Designed for long-lasting performance and durability  | ~                                    | ~                                  | V  |                                     | Class F,<br>110 mph           |

<sup>\*\*</sup> Wind warranty upgrade to 130 mph available.

| Miami-Dade Product<br>Control Acceptance | Conforms To CSA<br>Standard A123.5 | Limited Transferable Warranty Against Manufacturing Defects On Residential Applications '50-Year on Group-owned or Commercial Applications | StreakFighter<br>algae-resistance<br>Warranty (where available) | SureStart Protection | Wind-Resistance Warranty Upgraded wind warranty available. See warranty for details and limitations | Shingle Size                         | Bundles Per Square |  |
|--|------------------------------------|--|---|----------------------|---|--------------------------------------|--------------------|--|
| ~  | ~                                  | Lifetime*  | 15-year   | 10-year              | 15-year<br>110 mph<br>**  | 18" x 36"<br>8" Exposure             | 5                  |  |
| ~  | ~                                  | Lifetime*  | 15-year   | 10-year              | 15-year<br>110 mph<br>**  | 18" x 36"<br>8" Exposure             | 4                  |  |
| >  | V                                  | Lifetime*  | 15-year   | 10-year              | 15-year<br>110 mph<br>**  | 18" x 36"<br>8" Exposure             | 5                  |  |
| ~  | ~                                  | Lifetime*  | 15-year   | 10-year              | 15-year<br>110 mph<br>**  | 14 1/4" x 40"<br>4" Exposure         | 6                  |  |
| ٧  | •                                  | Lifetime*  | 15-year   | 10-year              | 15-year<br>110 mph<br>**  | 14 1/4" x 40"<br>4" Exposure         | 5                  |  |
|  |                                    |  |   |                      |   |                                      |                    |  |
| V  | ~                                  | Lifetime*  | 15-year   | 10-year              | 15-year<br>110 mph<br>**  | 13 1/4" x 38 3/4"<br>5 5/8" Exposure | 4                  |  |
| ٧  | •                                  | Lifetime*  | 15-year   | 10-year              | 15-year<br>110 mph<br>**  | 13 1/4" x 38 3/4"<br>5 5/8" Exposure | 4                  |  |
| V  | <b>v</b>                           | Lifetime*  | 15-year   | 10-year              | 15-year<br>110 mph<br>**  | 13 1/4" x 38 3/4"<br>5 5/8" Exposure | 3                  |  |
| ~  | ~                                  | Lifetime*  | 10-year   | 10-year              | 15-year<br>110 mph<br>**  | 13 1/4" x 38 3/4"<br>5 5/8" Exposure | 3                  |  |
| ٧  | •                                  | Lifetime*  | 15-year   | 10-year              | 15-year<br>110 mph<br>**  | 18" x 36"<br>8" Exposure             | 3                  |  |
|  |                                    |  |   |                      |   |                                      |                    |  |
| ~  |                                    | 25-year  | 10-year   | 5-year               | 5-year<br>60 mph  | 12" x 36"<br>5" Exposure             | 3                  |  |

CertainTeed starter and CertainTeed hip and ridge required

#### **High-Performance Starter**

Starter Course shingle specifically for use with Grand Manor, Belmont and Highland Slate—and the only approved installation alternative to using the shingles themselves.

- 10" x 36", 102 lineal ft. per bundle, 34 shingles per bundle
- Provides labor and cost savings by not cutting shingles
- Dual sealant strip for increased wind resistance
- · Better look with straight factory-cut eave edge

#### **Presidential Starter**

Required for and Presidential Shake TL and Presidential Shake applications.

- 13 1/4" x 40" (required double layer), 36.5 lineal ft. per bundle (based on 2-layer application), 22 shingles per bundle
- Two layers of straight factory-cut eave edge
- Available in the entire Presidential Shake TL and Presidential Shake color line
- · Assures Class A fire rating
- · Saves significant installation time

#### CertainTeed Swiftstart®

CertainTeed Swiftstart metric starter shingle is designed specifically for use with CertainTeed Landmark Series shingles. Rather than cutting expensive field shingles to use as starters, you can save time and money by starting with Swiftstart.

- Code-compliant, meets min. 2" headlap requirement for metric shingles; many competing products do not
- Each 18-piece bundle covers 116 lineal ft.
- Recommended for use to obtain enhanced warranties

#### Shadow Ridge®

- Hip and ridge for Landmark Series; 30 lineal ft. per bundle; 24 shingles per bundle
- Available in ClimateF/ex\* version, to be used with ClimateF/ex\* Shingles

#### Shangle® Ridge

 Hip and ridge for Grand Manor, Carriage House, Highland Slate and Belmont; 10 lineal ft. per bundle; 15 shingles per bundle

#### Mountain Ridge®

 Hip and ridge for Presidential TL, Presidential Shake, Presidential Solaris, Landmark Series and Landmark Solaris.


#### Cedar Crest®

 Hip and ridge for Landmark Series, Landmark TL, Presidential Shake, Presidential Shake TL, Highland Slate and Belmont; 20 lineal ft. per bundle

#### Ventilation

- CertainTeed Ridge Vent 9" filtered
- CertainTeed Ridge Vent 12" filtered/unfiltered
- CertainTeed Rolled Ridge Vent filtered/unfiltered
- CertainTeed Intake Vent filtered

With a portfolio of commercial and residential roofing products and quality standards that lead the industry, you can rest easily knowing CertainTeed has you covered.

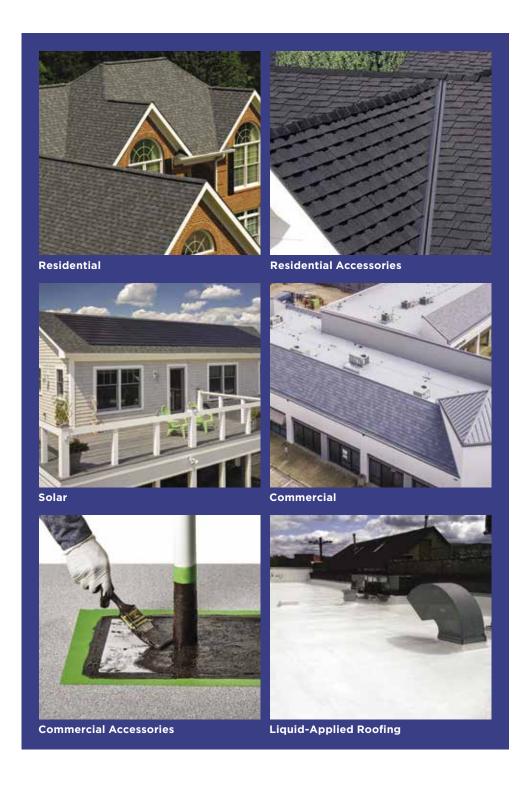

certainteed.com/roofing



