




TruDefinition®
DURATION®
SHINGLES
 with SureNail® Technology



The SureNail® Difference—
A technological breakthrough in roofing. The innovative features of Owens Corning® *TruDefinition®* *Duration®* Shingles with SureNail Technology® offer the following:

- Breakthrough Design.** Featuring a tough, woven engineered reinforcing fabric to deliver consistent fastening during installation.
- Triple Layer Protection™.** A unique “triple layer” of reinforcement occurs when the fabric overlays the common bond of the shingle laminate layers that offers excellent fastener holding power.
- Excellent Adhesion.** Our enhanced Tru-Bond®± sealant grips tightly to the engineered fabric nailing strip on the shingle below.
- Excellent Adhesive Power.** Specially formulated, wide adhesive bands help keep shingle layers laminated together.
- Exceptional Wind Resistance.** Engineered to deliver 209 KM/H* / 130 MPH wind warranty performance with only 4 nails. 33% fewer nails are required for warranty protection¹, which can mean fewer deck penetrations.

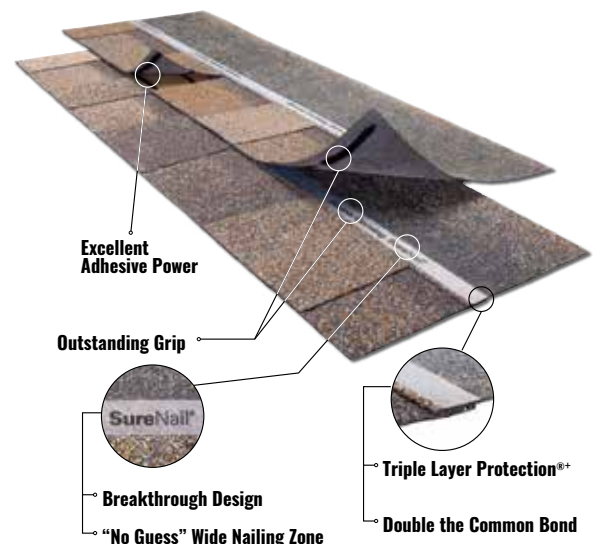

TOTAL PROTECTION. TOTAL CONFIDENCE.®

	SEAL.		DEFEND.		BREATHE.
--	--------------	--	----------------	--	-----------------



TruDefinition®
DURATION®
SHINGLES
 with SureNail® Technology

See map for colour availability in your area



Desert Tan[†]



Brownwood[†]



Teak[†]



Driftwood[†]



Onyx Black[†]



Quarry Gray[†]



Sierra Gray[†]



Harbour Blue[†]
 Not Available in Regions 2 & 3



Chateau Green[†]



Estate Gray[†]



Product Attributes

Warranty Length*

Limited Lifetime^{††} (As long as you own your home)



Wind Resistance Limited Warranty*

209 KM/H* / 130 MPH

Algae Resistance Limited Warranty*

10 Years

Tru PROtection™ Non-Prorated Limited Warranty* Period

10 Years

TruDefinition® Duration® Shingles Product Specifications

Nominal Size	13 ¹ / ₄ " x 39 ³ / ₈ "
Exposure	5 ⁵ / ₈ "
Shingles per Square	64
Bundles per Square	3
Coverage per Square	98.4 sq. ft.

Applicable Standards and Codes

CSA A123.5

ASTM D228

ASTM D3018, (Type 1)

ASTM D3161, (Class F Wind Resistance)

ASTM D7158, (Class H Wind Resistance)

ASTM D3462

ASTM E108/UL 790, (Class A Fire Resistance)

ICC-ES AC438#

*See actual warranty for complete details, limitations and requirements. †Owens Corning Roofing strives to accurately reproduce photographs of shingles. Due to manufacturing variances, the limitations of the printing process and the variations in natural lighting, actual shingle colours and granule blends may vary from the photo. The pitch of your roof can also impact how a shingle looks on your home. We suggest that you view a roofing display or several shingles to get a better idea of the actual colour. To accurately judge your shingle and colour choice, we recommend that you view it on an actual roof with a pitch similar to your own roof prior to making your final selection. Colour availability subject to change without notice. Ask your professional roofing contractor for samples of colours available in your area.

††This illustration depicts *Triple Layer Protection* and the amount of *Triple Layer Protection* may vary on a shingle-to-shingle basis.

‡*Tru-Bond* is a proprietary premium weathering-grade asphalt sealant that is blended by Owens Corning Roofing and Asphalt, LLC. ‡‡40-Year Limited Warranty on commercial projects. †Where allowed by code. ‡Applicable in Canada only. Preferred Contractors are independent contractors and are neither affiliates nor agents of Owens Corning Roofing and Asphalt, LLC, or its affiliated companies. #International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.



OWENS CORNING ROOFING AND ASPHALT, LLC
 ONE OWENS CORNING PARKWAY
 TOLEDO, OHIO, USA 43659

1-800-GET-PINK®
www.owenscorning.ca



Pub No. 500341-F Printed in Canada. March 2021. THE PINK PANTHER™ & © 1964 – 2021 Metro-Goldwyn-Mayer Studios Inc. All Rights Reserved. The colour PINK is a registered trademark of Owens Corning. © 2021 Owens Corning. All Rights Reserved.