



- 1 = WHITE/BLACK
- 2 = BLACK/WHITE
- 3 = WHITE/GREEN
- 4 = GREEN/WHITE
- 5 = WHITE/RED
- 6 = DRAIN
- 7 = RED/WHITE
- 8 = WHITE/ORANGE
- 9 = ORANGE/WHITE
- 10 = WHITE/BLUE
- 11 = BLUE/WHITE
- 12 = GREEN/YELLOW
- 13 = WHITE/BROWN
- 14 = BROWN/WHITE
- 15 = WHITE/YELLOW
- 16 = YELLOW/WHITE
- 17 = WHITE/VIOLET
- 18 = VIOLET/WHITE
- 19 = N/C

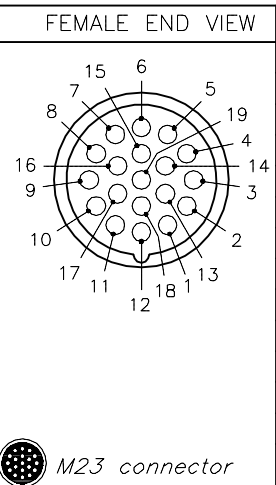

SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON or PBT
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
RATED CURRENT [A]	9.0 A (PIN 12), 2.0 A (ALL OTHERS)
RATED VOLTAGE [V]	150 V
OUTER JACKET MATERIAL/COLOR	TPU/PLUM
CONDUCTOR INSULATION MATERIAL	PVC/NYLON OVERCOAT
NUMBER OF CONDUCTORS [AWG]	16x22 AWG, 1x18 AWG GROUND
DRAIN/SHIELD	9x22 AWG DRAINS/ALUMINUM MYLAR SHIELD
CONDUCTOR ARRANGEMENT	8 SHIELDED TWISTED PAIR W/DRAIN, 1 GND, 1 DRAIN
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	IEC IP67
CABLE RATINGS	UL: ITC/PLTC 105C, 300V CSA: CIC/CMX-OUTDOOR-CM, 105C, 300V

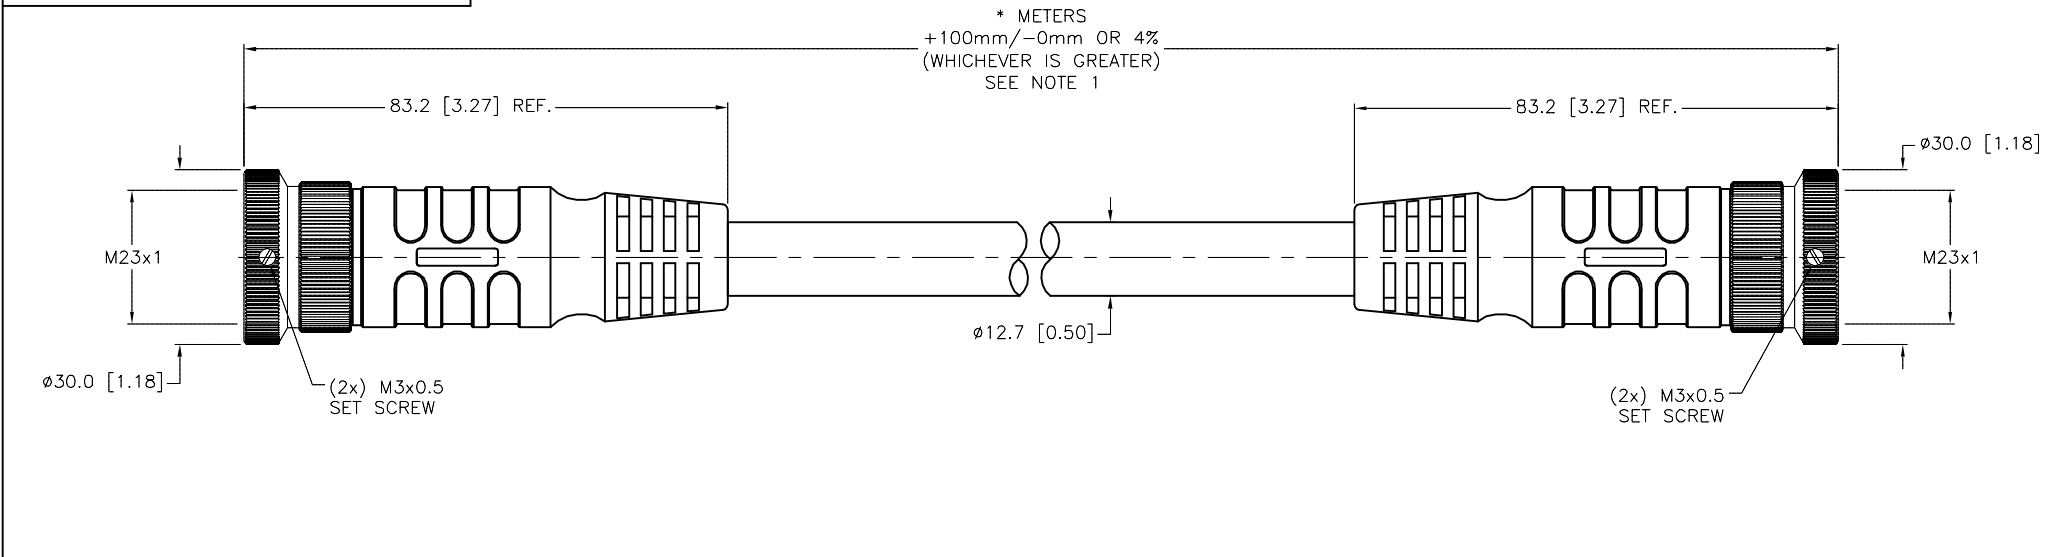

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC <i>High Technology Sensors and Automation Controls</i> 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com
	MATERIAL SEE SPECIFICATIONS	DRFT APVD	DJW DATE 04/03/07 SCALE NONE	
FINISH SEE SPECIFICATIONS	UNIT OF MEASUREMENT MILLIMETER [INCH]	CONTACT TURCK FOR MORE INFORMATION		IDENTIFICATION NO. REV F
F DRAWING PROCESSED AS PART OF ECO 39876	KMY BY	09/13/12 DATE	39876 ECO NO.	DO NOT SCALE THIS DRAWING FILE: 777016549 SHEET 1 OF 1